

EDDY CURRENT FLAW DETECTOR

WELDCHECK-2 SINGLE CHANNEL WELDCHECK+ DUAL CHANNEL PLUS



WELDCHECK-2 - SINGLE CHANNEL

WELDCHECK+ - DUAL CHANNEL

- Large, Crisp Daylight Readable Display
- User Friendly Interface and Ergonomic Lightweight Design
- Industry Standard Probe Connectors
- Eight Hour Battery Life
- Rapid 2.5 hour charging time
- Two-Year Warranty
- Advanced Features 'Loop', 'Guides' and Automatic Lift Off Gain Connection



Both the WELDCHECK+ and WELDCheck 2 can perform a great many eddy current inspection tasks due to their superior performance including weld inspection, surface defect detection and low frequency inspection of non-ferrous material.

The WeldCheck 2 is a single Channel/Frequency instrument that offers a simplified specification but none the less boasts a 10Hz-20MHz frequency range.

The WeldCheck+ instrument is a dual channel/frequency eddy current inspection instrument with conductivity. The dual channel/frequency capability means that the instrument can perform, in addition to single frequency, applications that require dual frequency.




INDUSTRY STANDARD PROBE CONNECTORS

The WELDCHECK series is able to use a wide range of eddy current probes meeting all the needs of the Aerospace Eddy Current Inspector. Absolute, bridge and reflection connected probes can use the industry standard 12 Way LEMO Connector and a LEMO 00 Connector is also provided for simpler connection of absolute probes.



WIDE FREQUENCY RANGE

The single frequency WELDCHECK2 has a frequency range of 10Hz to 20MHz, whereas the dual channel WELDCHECK+ offers 10Hz -12.8MHz, ensuring a diverse range of real world applications can be met.

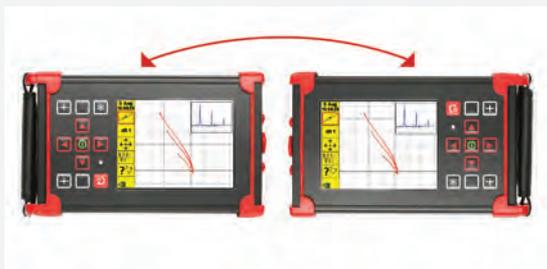

WORKS THE WAY YOU DO!

The WELDCHECK series has been created with User convenience and efficiency in mind at all stages of the design and manufacturing process. One Key Benefit of the WELDCHECK is the ability to work identically in left-handed and right-handed mode; thanks to the incredible "Flip" function.

LIGHTWEIGHT, COMPACT & RUGGED

The WELDCHECK series weighs just 1.2kg (2.7lbs) and has a robust tough aluminium alloy Mg Si 0.5 powder-coated outer case and fitted with rubber feet to aid grip, with the internal design optimised to resist moist, tropical or salt-laden atmospheres.

Both instruments have two integrated moulded "Sure Grip" handles on the rear of the case making it equally at home whether on the workshop bench or in the field.

The WELDCHECK series have enhanced durability through a fully-fitted, custom-designed outer "protective boot" and integral hand-strap for even greater ruggedness and easier grip in use.



DAYLIGHT VISIBLE LARGE COLOUR SCREEN

We understand that the operator will use the WELDCHECK in all types of weather and light conditions and being able to see the screen clearly is a top priority.

The WELDCHECK has a fully daylight readable 14.5cm LCD Colour Screen of 640 x 480 pixels ensuring the Operator has excellent signal resolution and presentation no matter what the working conditions are.

The operator has the choice of configuring their own colour schemes and display types. This will optimise their viewing ability of the screen in any light conditions. It is possible to view the readings in a choice of spot, time-base, waterfall or meter display types.

EXTRAORDINARY BATTERY LIFE


With more than 8.5 hours battery life with a 100kHz Weld Probe and maximum backlighting, the WELDCHECK is an obvious choice when faced with a long day of Eddy Current NDT. With the internal memory able to store over 500 saved readings, the WELDCHECK can easily be in the field for an entire shift without needing to be returned to base for charging.

Even better, the AA battery power pack can extend the battery running time for a further 4 hours.

EQUIPPED FOR ALL ENVIRONMENTS

We know that in an oilfield environment the WELDCHECK is going to come up against some of the harshest working conditions in the NDT industry, not to mention being lifted and lowered on ropes, dropped and bumped.

With a rear foot stand and four harness attachment points, the WELDCHECK is designed to be used in all environments from the desktop in the office to the rigours of the job site.




EASY TO USE MENUS & ICON SYSTEM

The WELDCHECK series menu system is simple and fast to navigate with the ability to add individually selectable soft key menu items to the sidebar as recognisable icons for rapid function access and a quick setting menu for easy set-up, review and adjustment.

With four operator-selectable soft keys and a fifth slot for the last menu function used, Technicians can quickly set up the system with their preferences. Each saved instrument setting can be associated with a unique, single press set of quick access soft keys. There are also two front panel hard keys that can be readily programmed for rapid single press access to frequently used functions.

RECORD AND REPLAY

Up to 164 seconds of live data may be recorded in real-time and then played back either on the instrument or on a PC. Using the desktop application ETHERANALYSER for subsequent analysis and review. The recorded data may be further optimised by adjusting many settings including phase, gain, filters, display and spot position.

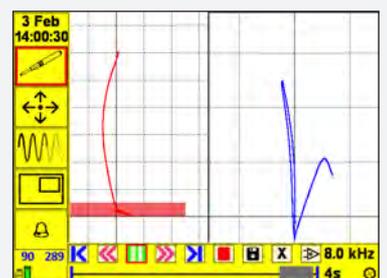


ALL POSSIBLE APPLICATIONS COVERED!

The WELDCHECK 2 and WELDCHECK+ offers maximum flexibility when deciding which features are needed for your application. As well as the hand-held WELDCHECK, AEROCHECK 2 and AEROCHECK+ instruments, the range also includes the VICTOR 2.2D for inline component testing solutions.


KEY DIFFERENCES

	Kit part Number	Frequency	Frequency Range	Guides	Loop & Trace	Protective Boot & Integrated Strap	Auto Lift-Off Gain Compensation	Conductivity	Removable Data Storage	Splash Case Part Number
WELD-CHECK 2	KIWEL003	Single	10-20MHz	Yes	Yes	Yes			32GB	AAER004
WELD-CHECK+	KIWEL002	Dual	10-12.8MHz	Yes	Yes	Yes	Yes	Yes	32GB	AAER004


EXCEPTIONAL SCREEN CLARITY FOR ANY APPLICATION

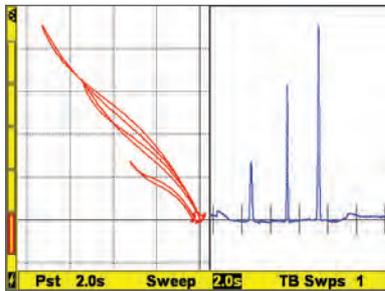


50/50 XY & Timebase

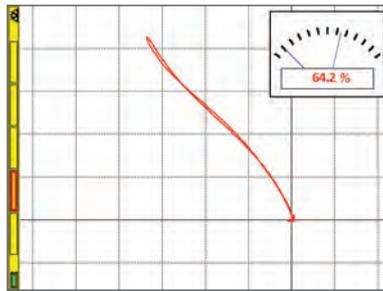


XY with Small Meter

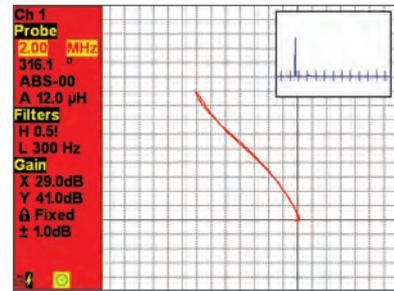


XY with small timebase and Quick Menu

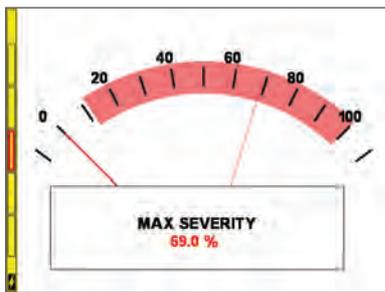

Meter Full Screen

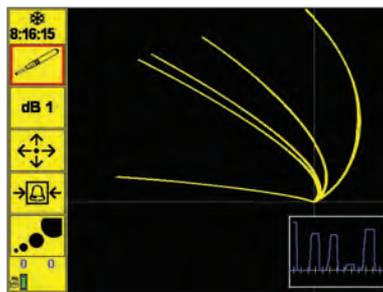

Dark background polar graticule and soft-keys

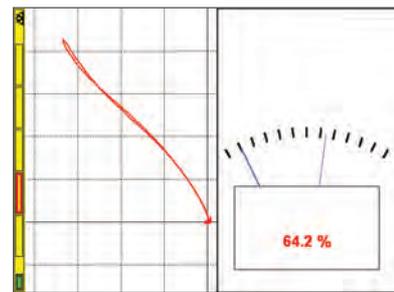

XY and Meter 50/50



XY Full screen with Box Alarm



Simple single screen menu showing four user assignable soft keys and one "last item used" soft key




Timebase Full Screen with level arm

FEATURES AVAILABLE ON THE WELDCHECK 2 & WELDCHECK+



GUIDES FEATURE: “Guides”, allows the user to display a slide show that can be created easily with commonly used desktop software. The benefit of this

feature is that instructions, tutorials and procedures for an inspection can be added to the WELDCHECK+ very quickly and the NDT inspector can easily switch between the inspection itself and the “Guides” while performing a live test.

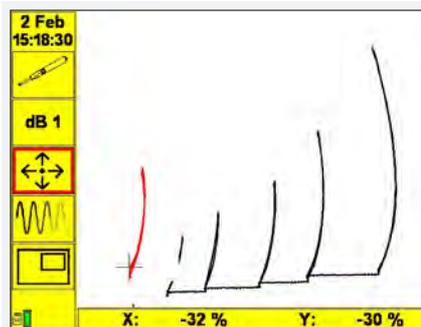

TRACE FEATURE: The trace function allows a reference waveform to be stored on the screen and appears along with the graticule behind the live spot. This


allows the operator to readily compare the live data with the reference calibration.

“LOOP” FEATURE: “Loop” is a convenient way of capturing a short live repetitive signal and then optimizing the instrument settings through real time adjustments of the Phase, Gain, Balance, Filters and Display Configuration in order to simplify the task of optimising the parameters.

The “Loop” function is excellent for calibration set up especially for setting the filters for Rotary and Dual Frequency mix.

EXCLUSIVE FEATURES ONLY AVAILABLE ON THE WELDCHECK+


DUAL FREQUENCY / CHANNEL FEATURE: At different frequencies, different signal indications (e.g. lift off and defect) have a different relative phase and amplitude response. By means of phase rotation and Gain change of the X Y signal components one of these indications can be manipulated to be almost identical in phase and amplitude as the other and then by subtraction (mixing), the unwanted component is minimised, giving an improved detection of the wanted signal.

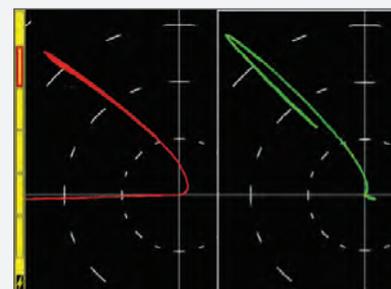

AUTO-MIX FEATURE: A dual frequency mix exploits the phase and sensitivity change between two different types of indication to suppress one and enhance the other.

Auto-mix simplifies the sometimes complex procedure of mixing two different frequency signals and can be achieved on the WELDCHECK+ through a series of easy steps. Ultimately once set up, the Auto-mix itself is as simple as pressing one key.

AUTOMATIC LIFT OFF GAIN COMPENSATION: The Lift Off Gain (LOGC) is a feature that automatically compensates the gain of the defect channel according to the paint thickness thus ensuring that a defect signal will appear the same height irrespective of the paint thickness.



CONDUCTIVITY MEASUREMENT: When connecting the Conductivity Probe, the WELDCHECK+ auto-detects the probe and seamlessly switches into conductivity mode. Removal of the probe switches the instrument back to flaw detection mode.

NB: The Conductivity Measurement Option is available through the purchase of the KACON001 KIT.

Both the WELDCHECK 2 and WELDCHECK+ are supplied with a standard “Two-Year Manufacturers Warranty”.

This covers all components of the Instruments and only excludes customer damage or misuse.

The “Two-Year Warranty” can be extended to “Five Years” through purchase of “ETHERCover” extended warranty protection.

SPECIFICATIONS

		WELDCHECK 2	WELDCHECK+
Probe	Connectors	12 Way Lemo 2b (Absolute, Bridge and Reflection) and Connection Lemo 00 (for single element absolute probes).	Simultaneous probe operation possible using Lemo 12 way and Lemo 00.
	Rotary	600-3000 rpm - Ether Mercury Drive (ADR002), Hocking 33A100, Rohmann MR3, SR1 and SR2 Drive (special adapter needed)	
Frequency		Single Freq. = 10Hz – 20MHz with range variable resolution.	Dual Freq. = 10Hz - 12.8MHz
Gain	Overall Input Drive Max X/Y Ratio	-18 to + 100 dB, 0.1, 1 and 6dB steps (100dB maximum) 0dB or 12dB 0dB, 6dB and 10dB (0dB reference 1mW into 50 ohm). +/-100.0 dB	
Phase	Range Auto Phase	0.0-359.9°, 0.1° steps Allows phase angle to be automatically set to a pre set angle	
Filters	Normal High Pass Normal Low Pass	DC to 2kHz or Low Pass Filter, which ever is the lower in 1 Hz steps. Plus variable adaptive balance drift compensation 0.01 - 0.5 Hz (6 steps). 1Hz to 2kHz or a quarter of the lowest test frequency, which ever is lower in 1 Hz steps.	
Balance	Manual Automatic	14 internal balance loads; 2.2µH, 5.0µH, 6.0µH, 6.5µH, 7.0µH, 7.5µH, 8.2µH, 12µH, 15µH, 18µH, 22µH, 30µH, 47µH, 82µH Optimised balance load selection.	
Alarms	Box Sector Output	Fully configurable, Freeze, Tone or visual. Fully configurable, Freeze, Tone or visual. Open collector transistor (50v dc at 10mA max) available on 12 way lemo.	
Display	Type Viewable Area Resoluitiion Flip Colour Schemes Configurable Screen Display Modes Graticules Offset Digital Spot Position Readout Summary	5.7" (145mm), 18 bit Colour, daylight readable. 115.2mm (Horizontal) x 86.4mm (Vertical) 640 x 480 pixels Manual or automatic screen orrientation change to enable left or right handed use. User configurable Dark, Bright and Black & White Full Screen, Single, Dual Spot or Dual Pane with variable size and location and function e.g. XY, Timebase, Waterfall and Meter. Spot, Time base (0.1-20 seconds x 1-200 sweeps and up to 55 seconds), Waterfall and Meter with peak hold and % readout. None, Grid (4 sizes 5, 10, 15 and 20% FSH), Polar (4 sizes 5, 10, 15 and 20% FSH) Spot Position: Y =-50 to +50, X =-65 to +65% Display in X,Y or R,θ Display of all settings in Legacy Format	
Removable Data Storage	Setup Storage Stored Screen Shots Record Replay	micro SD up to 32GB, holding over 10,000 settings micro SD up to 32GB, holding over 10,000 screen shots Comprehensive Record Replay and Storage Real-time recording of trace data and Replay on instruments and desktop PC up to 164 seconds	
Outputs	PC Connectivity Digital volt free alarm VGA	USB (Full PC remote control plus Real Time data) On Lemo 12 way Open collector transistor (36v dc at 10mA max). Full 15 way VGA output	
Languages		English, French, Spanish, Russian, Japanese, Chinese, Turkish.	
Verification Level		The system includes on delivery a 2 year validity Verification Level 2 detailed functional check and calibration as per ISO 15548-1:2013	
Power on Self Test		The system performs a self test on start up of external ram, sd ram, accelerometer, Micro SD card, LCD screen buffer.	
Power	External Battery Running Time Charging Time	100-240 v 50-60Hz 30 Watts Internal 7.2V nominal @ 3100mAh = 22.32 watt.hr Up to 8 hours with a 2MHz Pencil Probe 30% Back Light and up to 6 hours with a Rotary Drive at 3000rpm 50% duty cycle. 2.5 hrs. charge time, Simultaneous charge and operation.	
Physical	Weight Size (w x h x d) Material Operating Temp Storage Temp IP Rating	1.2 kg, 2.7 lbs. 237.5mm x 144mm x 52mm / 9.4" x 5.7" x 2.1" Aluminium alloy Mg Si 0.5 powder-coated -20 to +60 °C Storage for up to 12 months -20 to +35 °C Nominal +20 °C 54	

PROBE KITS

KASUR001 KIT Surface Inspection (4 probes, lead and Al and Fe Test Block)

KASUBS001 KIT Sub Surface Inspection, Low Frequency (2 probes, lead and test piece)

KAROT001 KIT Mercury Rotary Drive and Cable Only

KACON001 KIT Conductivity Kit (Probe, Calibration and Cable) - (AeroCheck+ & WeldCheck+ only)

ADVANCED FEATURES

Advanced Features	Guides	Create and display a slide show containing instructions, tutorials and procedures using Microsoft PowerPoint.
	Attachments	Screenshots and Data Recordings are saved in a folder with the name of the Settings.
	Loop	Capture a live repetitive signal and then optimise the instrument settings (Phase, Gain, Filters) to simplify optimising the parameters
	Trace	Allows a calibration reference signal to be stored on the screen and then compared with the live signal
	Data Output	Real-time post processed over USB at 8kHz overall for all 3 data pairs (X, Y and Mix) with DLL for embedding functionality into software.

CONDUCTIVITY SPECIFICATION (WELDCHECK+ ONLY)

Frequency	One frequency only 60kHz standard (choice of 120, 240 and 480kHz)
Accuracy	0.5%-10% IACS better than +/-0.05% IACS 10%-25% IACS better than +/-0.25% IACS 25%-60% IACS better than +/-0.5% IACS 60%-110% IACS better than +/-1% IACS Lift Off corrected to 1.0mm No temperature compensation All Errors at 90% Confidence Level
Resolution	3 decimal points max Auto Resolution Mode AutoS = Legacy Instrument, Auto = SigmaCheck

EQUIPMENT KITS

STANDARD WELDCHECK SERIES KITS

KIWEL003 Kit, WeldCheck2, Eddy Current Portable Flaw Detector, Including:

IWEL003 Instrument, WeldCheck2, Single Frequency, (10Hz-12.8MHz)

Hand Held, Portable Flaw Detector. Software + Manual on USB Stick

AWEL002 AeroCheck, Power Adapter + Input Plugs (UK, EU, US & Australia)

AWEL003 Adjustable Shoulder Strap, Padded with Quick-Release

AC006 Instrument Soft Carry Case

A090 USB Cable, A to MIN B

40463 Quick Reference Card

KIWEL002 Kit, WeldCheck+, Eddy Current Portable Flaw Detector, Including:

IWEL002 Instrument, WeldCheck+, Dual Frequency, (10Hz-12.8MHz)

Hand Held, Portable Flaw Detector. Software + Manual on USB Stick

AWEL002 AeroCheck, Power Adapter + Input Plugs (UK, EU, US & Australia)

AWEL003 Adjustable Shoulder Strap, Padded with Quick-Release

AC006 Instrument Soft Carry Case

A090 USB Cable, A to MIN B

40463 Quick Reference Card

ALLCX-M02-015A Lead, Lemo 00 to Microdot, 1.5m (Absolute)

ALL12-L04-015R Lead, Lemo 12-Way - Lemo 4-Way (Reflection)

OPTIONAL ACCESSORIES

AWEL004 Hard Transit Case

AAER004 Protective Splash Proof Cover (WeldCheck2, WeldCheck+, AeroCheck2, AeroCheck+)

AWEL006 External, 8 x AA Battery Holder with On/Off Switch

AWEL008 In car Power Adapter

ALL12-L04-015R Lead, Lemo 12-Way - Lemo 4-Way, 1.5m (Reflection)

ALL12-L04-015B Lead, Lemo 12-Way - Lemo 4-Way, 1.5m (Bridge)

ALLCX-M02-015A Lead, Lemo 00 to Microdot, 1.5m (Absolute)

ALLCX-B02-015A Lead, Lemo 00 to BNC, 1.5m (Absolute)

ARD002 Mercury (mini) Rotary Drive

ALL12-L12-020M Lead to connect Mercury (mini - ARD002) Rotary Drive, Lemo 12-Way, 2m

ALL12-F08-020ETH Adapter, lead to connect Rohmann Rotary Drive

MR3, SR1 and SR2, Lemo 12-Way, 2m.

40470 Tripod Bracket To fit 1/4" Camera Tripod Mount with Male Screw

