




Twin Compression

Features

- Dual normal beam compression wave contact probe.
- Semi-circular lead zirconate titanate crystal.
- Medium damped for medium bandwidth.
- Acrylic shoe facilitates profiling to curves parts.
- Button probe case with side-entry cable to facilitate inspection access.
- Integral 2m cable.

Frequent Applications

- Aerospace
- Bond Testing
- Solder Joints
- Machined Parts
- Thickness
- Tube & Pipe
- White Metal

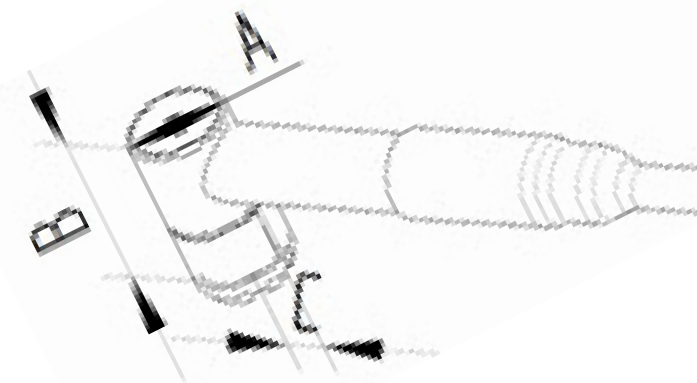

Transducer Models			
type	f	∅	N
p/n	(MHz)	(mm)	(mm)
D2-10	2.25	10	7
D5-5	5	5	6
D5-10	5	10	7

Size Options				Connector Options										
Probe Size (mm)	Case Dimensions (mm)			Connector Type						Connector Position				
	∅	A	B	C	BNC (B)	Lemo 1 (L)	Lemo 00 (Z)	Microdot (D)	Subvis (S)	UHF (U)	Top (T)	Rear (R)	Side	Cable
5	17.0	10.0	7.0		•	•	•	-	-	-	-	-	-	•
10	17.0	16.0	12.5		•	•	•	-	-	-	-	-	-	•